



- visible innovation


LEDPROOF



HUB

The LEDPROOF HUB is a fitted solution for a built-in, recessed, ceiling mounted or wire hanging square lamp.

It can be delivered with or without diffuser, and in any dimension you prefer, hence the HUB will fit your office, hallway, stairwell with perfection.

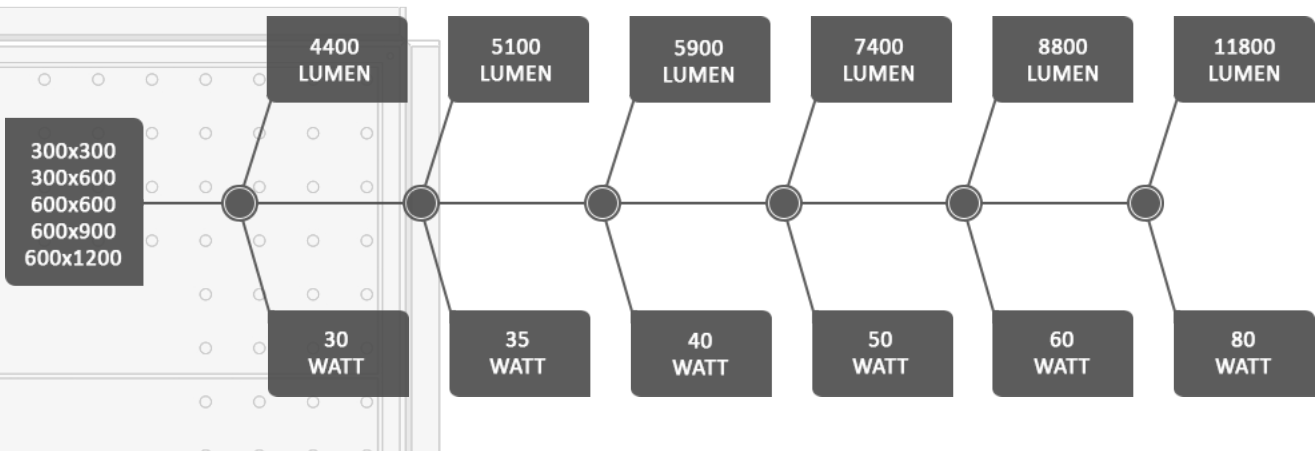

Lifetime (yrs)	100.000	Input voltage (VAC)	110-230V
Warrenty (yrs)	5	Frequency (Hz)	47-63Hz
CCT (K) (Tolerance +3,5%)	3000 (-5% lumen) 4000 5000 (+5% lumen)	PFC	>0.98
CRI/RA (Tolerance +3,5%)	80 90 (-8% lumen)	Dimmable	Yes (except 30-35W)
Lens (Angel)	60 degree (optional) 120 degree	Efficiency	89%
Diffuser	Opal (-20% lumen) PMMA (-8% lumen)	IP	IP20 IP65 Optional
		Certification	CE (30W, 35W) CE TÜV (40-80W)

LEDPROOF delivers state of the art Danish LED solutions with an unprecedented low Total Cost of Ownership (TCO), and we produce all our products in Denmark.

Our products differentiate due to our patented heat distribution and dissipation technology that also provides for the unique and elegant design options, together with a substantial warranty on all our standard products.

Today LEDPROOF's lightning solutions are installed worldwide in industry, retail and offices as well as public and street lightning.